

Rugged Design Professional Quality Proven Performance Economically Priced

The Profitable Source for Finishing Products

Gfp 563TH-2 MaxPro Maximum Productivity Top Heat Laminator

What's the best way to make your production even better? Shorten film loading time? Make fewer film changes? Increase throughput speed? The 563TH-s does all that and more.

563TH-2

MAXIMUM PRODUCTIVITY 50% faster throughput FAST ROLL CHANGES Front/Rear Swing-out shafts EASY LOADING 3" Aluminum Quick-Grip shifts RUGGED DESIGN Metal Alloy heaters VERSATILE Roll-to-Roll capability



overlamination • mounting • board pre-coating

Spend less time on set-ups and changeovers with swing-out supply shafts. 50% faster throughput and quick application changes save time, effort and money.



- Swing-out supply shafts
- Labor saving Quick Grip film shafts
- Photoelectric eye for safety
- Optional motorized rear rewind
- Swing-up feed table & 38" output height
- Metal Alloy heater reduces breakage
- 4.5" diameter roller



Motorized rear rewind for roll-to-roll applications

Swing out shafts for faster film changes



563TH-2


APPLICATIONS

Signs Banners POP Displays Trade show displays Graphic mounting Photo mounting Dry-erase boards Floor graphics Window graphics Vehicle graphics



Warranty: 1 year parts & labor. Installation is available.

Laminating Width	63"
Roller Diameter	4.5"
Roller Gap	1"
Rear rewind	Optional
Maximum temperature	122°F
Laminating speed	0-20 ft/min
Pressure adjustment	Hand Wheel
Heat method	Metal Alloy heater
Max. roll diameter	8" OD (top); 16" OD (bottom)
Supply Shafts	2 Swing-out
Tension Adjustment	Single knob
Power Supply	120v 12A
Power Consumption	1440W
Foot Pedal	Included
Stand with casters	Included
Net Weight w/ stand	502 lbs.
Dimensions	82" x 28.5" x 50"
Machine Shipping	507lbs.; 89.4" x 33.1" x 29.2"
Stand Shipping	143 lbs.; 75" x 33" x 5.8"

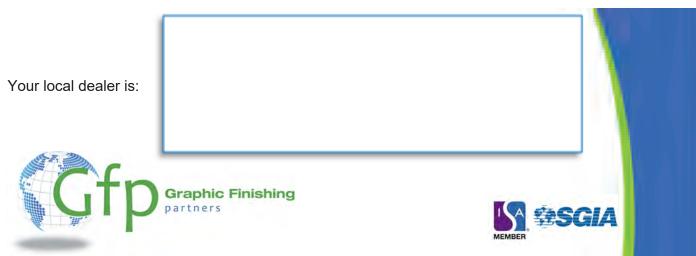

Graphic Finishing Partners LLC P.O. Box 1097 Maryland Heights, MO 63043 www.gfpartnersllc.com REV 2-10-17